




Diaphragm Valve Straight Through Type

Features

- Flange PN10/16 (550) or ASA150 (560)
- Cast Iron Body Unlined
- Non Rising Handwheel Bonnet

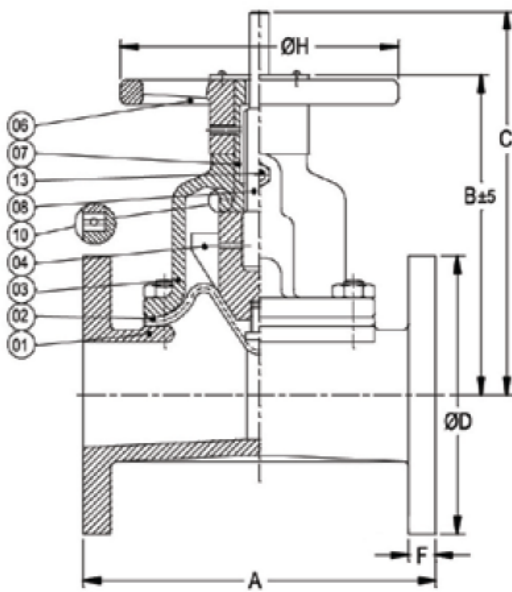

Diaphragm Available	Temperature Range
Grade A - Natural Rubber	-30°C to +80°C
Grade EP - EPDM	-30°C to +150°C
Grade R - Nitrile	-10°C to +90°C
Grade N - Neoprene	-25°C to +95°C
Grade B - Butyl	-25°C to +120°C
Grade H - Hypalon	-15°C to +100°C
Grade V - Viton	-5°C to +150°C

Technical Data
250mm to 300mm
3.5 bar

N.	Part Name	Materials
01	Body	Cast Iron
02	Diaphragm	As per list
03	Bonnet	Cast Iron
04	Compressor	Cast Iron
06	Handwheel	Cast Iron
07	Stem Bushing	S. G. Iron
08	Stem	Stainless Steel 410
10	Thrust Bearing	Steel
13	Lubrication Fitting	Steel

DN	250	300
A	635	749
B (Closed)	655	655
C (Open)	846	846
øD	406	483
øH	690	690
F	24.0	24.0
Kgs	188	330

Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.