



Type AVC-1000 & AVC-3000 Pressure Volume Controller



APPLICATION

 For applications requiring extremely fine pressure adjustment

FEATURES

- Precisely set a pressure in a closed pneumatic system
- Pneumatic Volume controller
- Vacuum 1,000 or 3000psi
- Piston/cylinder device provides fine adjustment in closed pneumatic systems

Ashcroft® Pressure Volume Controllers provide an easy-to-use means of rapidly and accurately adjusting pressure in a closed system. These pressure controllers provide the ability to precisely adjust pressure within 0.00025 psi. When used with digital pressure gauges, dial gauges, transducers, pressure switches, air deadweight testers, manometers and other similar devices they provide a fast and accurate means for setting a precise pressure.

STANDARD SPECIFICATIONS

Model	AVC-1000	AVC-3000
Range (psi)	Vacuum-1000	Vacuum-3000
Proof (psi)	2000	6000
Burst (psi)	6000 min.	12,000 min.
Resolution (psi)	0.00025	0.0005
Volume Change (cubic inches)	3.5	2.5
Mechanical Rotation (total turns)	31	61
Connection	1/8 NPTF	1/8 NPTF
Operating Temperature. Range	20-120° F	20-120° F
Construction Aluminium body, Stainless Steel, Brass, Teflon, Delrin and Buna-N		

Balance Valve Open System in Pressure Balance or Vent Mode

Vent Valve


Vent Valve

Vent Valve

Balance Valve

Balance Valve Closed

System in Test Mode

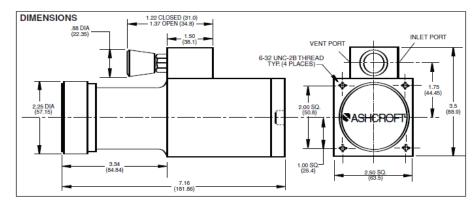

V-Flow Solutions Ltd 12 Railton Road, Woburn Road Industrial Estate, Kempston, Bedford MK42 7PW

Tel: 01234 855888 Fax: 01234 857775

E-mail: sales@v-flowsolutions.co.uk Web: www.v-flowsolutions.co.uk

