

### XP600 Pressure Switch - *Water, Steam & Aggressive Media*

Body Material - Brass

Thread - G1/8, ISO228/ISO7 (G1/4 on-request)

Main Body - technopolymer (PET)

Membrane and Sealing - AISI316 and Silicon

Protection Degree - IP00

Adjustment - By screw

Rated Impulsive Voltage- 2,5KV

Microswitch - SPDT 10(2)-250VAC

SPST-NC 10-250VAC

SPST-NO 10-250VAC



Electrical Connection- terminal 6,3x0,8mm

Operating Ambient Temperature - T125°C

Burst Pressure - >20 bar

Thermic Drift - 0.04 bar for 10°C *with respect to temperature of +20°C*

Optional IP45 Protection Boot - REF: A0158100.020

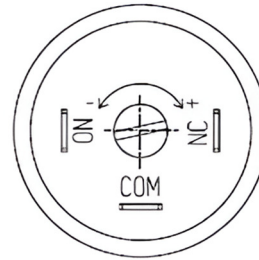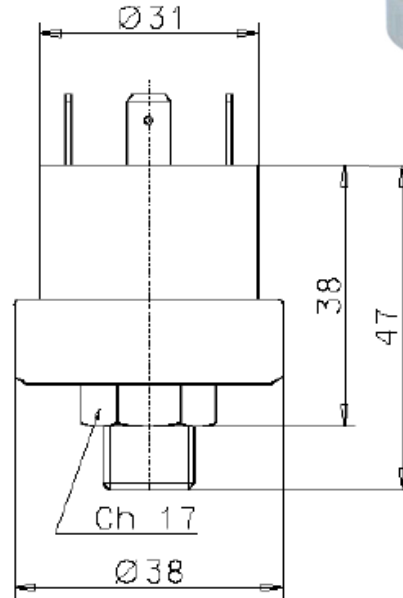

Pressure Connection	Part Number	Adjustable Pressure Range	Fixed Differential Bar	Electrical Data	Weight GM
G 1/8 M	XP73AE61.000	0.2 - 1.2	0.30 ± 0.15	10A x 250V	80
G 1/8 M	XP73AC61.000	1.0 - 2.5	0.30 ± 0.15	10A x 250V	80
G 1/8 M	XP73DE61.000	1.5 - 4.0	0.35 ± 0.15	10A x 250V	80
G 1/8 M	XP73EE61.000	2.0 - 6.0	0.35 ± 0.20	10A x 250V	80

Homologations: EN60730-1, EN60730-2-6, UL/CSA File E157180

