


VFE-87/VFE-88 - Electrically Actuated 3 Way Brass Ball Valve

Actuator	VF-0S						VF-1S		
	DN	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
A	199	199	202	211	216	221	266	275.5	
E	169	169	169	169	169	169	196	196	
L	189.5	189.5	189.5	189.5	189.5	189.5	189.5	189.5	
D	110	110	110	110	110	110	110	110	
Operating Time	10s	10s	10s	10s	10s	10s	13s	13s	

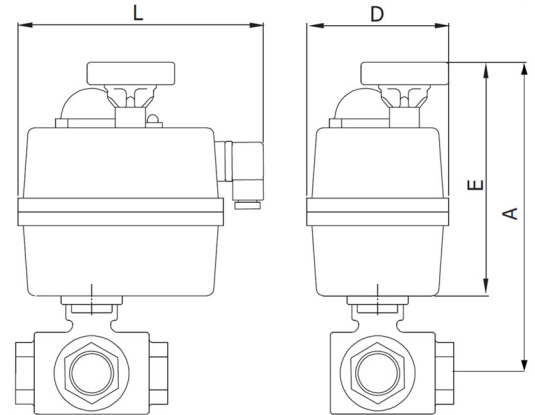


Actuator Specification	
Enclosure	Weatherproof IP67
Power	24V to 240V AC / 24V to 110V DC
Limit Switches	4X SPDT microswitches (2 motor stop and 2 confirmations)
Anti-Condensation Heater	3.5W
Connector	Large = EN175301-803 Form A / Small = DIN 43650/C
Operating Temperature	-20°C to +70°C
Manual Override	Declutching Handwheel
Cover, Body, Cams Material	Polyamide A6
Options:	Battery Failsafe Digital Positioning System (4-20mA, 0-10V) 180° and 270° operation 12V AC/DC power supply

Valve Specification	
Body	Chrome Plated Brass CW617N
Ball	Chrome Plated Brass CW614N 1" > 2" = CW617N
Seats	PTFE
Seals	Viton
Connection	Screwed BSP Taper
Maximum Pressure	1/4" - 3/4" - 30 Bar 1" - 1 1/4" - 20 Bar 1 1/2" - 2" - 62 Bar
Valve Operating Temperature	-25°C to +200°C
Ambient Temperature	-10°C to +50°C

T-port or L-port?


T-port valves provide flow straight through the valve. i.e. 1 > 2 or 2 > 1.

When operated flow is diverted to either 1 > 3 / 3 > 1 or 2 > 3 / 3 > 2

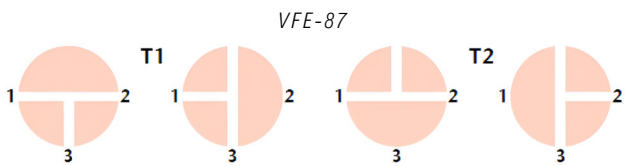


L-port valves are used for diverting or mixing applications.

i.e. 1 > 3 / 3 > 1 or 2 > 3 / 3 > 2



Pressure / Temperature:

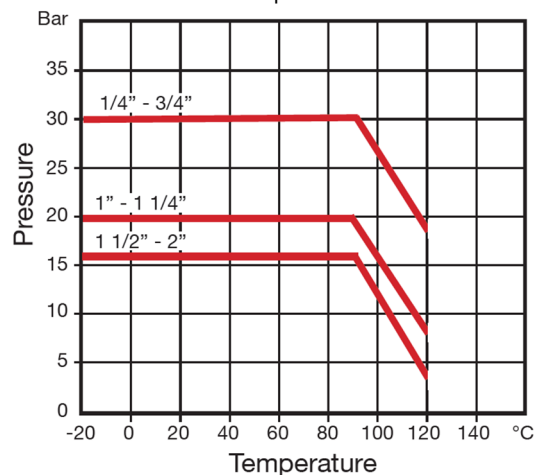

Subject to alteration without notice. Uncontrolled Copy, not subject to automatic updates

LED Status Indication		
No power	LED off	
Actuator Fully Open	Red Led Solid	
Actuator Fully Closed	Green Led Solid	
Moving Open > Closed	Red and Orange Flash	
Moving Closed > Open	Green and Orange Flash	
Torque lim. Engaged Open > Closed	Red Blinking	
Torque lim. Engaged Closed > Open	Green Blinking	
Manual Mode Engaged	Orange Blinking	
Battery Failsafe Activated Normally Open	Red Intermittent	
Battery Failsafe Activated Normally Closed	Green Intermittent	
Battery Failsafe Needs Charging	Orange Intermittent	
Digital Positioning System Stationary	Blue Solid	
Digital Positioning System Opening	Blue and Green Flash	
Digital Positioning System Closing	Blue and Red Flash	

Standard Electrical Connections

On - Off V AC

VF-0S - VF-1S

On - Off V DC

VF-0S - VF-1S

A = Power supply plug (Grey plug)
 Neutral PIN 1 + Phase PIN 2 = Close Actuator
 Neutral PIN 1 + Phase PIN 3 = Open Actuator
 Earth/ground connection - Flat PIN

B = Volt free contact plug (Black Plug)
 Common PIN 1 + PIN 2 = Close confirmation of position
 Common PIN 1 + PIN 3 = Close confirmation of position

Positioner V AC / DC

VF-0S - VF-1S

A = Power supply plug (Grey plug)
 Neutral/Negative PIN 1 + Phase/positive PIN 2 - Power Supply
 Earth/ground connection - Flat PIN

B = Volt free contact plug (Black Plug)
 Common PIN 1 + PIN 2 = Close confirmation of position
 Common PIN 1 + PIN 3 = Close confirmation of position

C = Input/output signal (Black plug)
 Negative PIN 1 + positive PIN 2 = Input signal
 Negative PIN 1 + positive PIN 3 = Output signal

C = Instrumentation signal **MAX 10V**

Digital Positioner System: Earth should not be connected to avoid self adjustment of the actuator position