


RB397 Series, Automation – 3/2 Normally Open

Specifications	
Function (single acting)	 <p>Flow direction underseat 2 → 1</p>
Maximum Viscosity	Max. 21cST (3 °E)
Body Material (Std)	Low lead content Brass CW719R (EN 12165)
Orifice Material	Stainless Steel 1.4305 EN 10088 (AISI 303)
Tube	Stainless Steel AISI 304
Flange	Stainless Steel 1.4305 EN 10088 (AISI 303)
Plunger	Stainless Steel 1.4105 EN 10088 (AISI 430F) or equivalent
Top Stop	Stainless Steel 1.4105 EN 10088 (AISI 430F)
Springs	Stainless Steel AISI 302
Seal Material (Std)	Foodgrade FKM
Connection Type (Std)	G parallel thread (ISO 228-1)
Shading Ring	Copper
Electrical Characteristics	
Standard Coil Voltage DC (=)	24 V
Standard Coil Voltage AC 50 Hz (-)	24 V, 110 V, 200 V, 230 V
Standard Coil Voltage AC 60 Hz (-)	24 V, 120 V, 220 V, 240 V
Voltage Tolerance	+10% to -15% (AC)
	+10% to -5% (DC)
Duty Cycle	100% ED
Protection Class	IP65 (EN 60529) with plug and gasket correctly fitted *
Electrical Connection	to industrial form B
Coil Insulation	Class F 155 °C
Power Rating (Standard)	AC 10 VA (holding) AC 16 VA (inrush) DC 7 W

Features and Benefits

- Direct Acting
- Robust construction for industrial applications
- Zero pressure rated
- Stainless steel AISI 430F operators with low residual magnetism
- Coils tested 100% in compliance to RoHS directive and to relevant international standards
- Choice of high quality seal materials
- Valve suitable for contact with food media as per the EEC Directives and Regulations. Please consult supplier for more details
- Response time 5 to 25 ms



Pipe Size	Cv (gpm)	Kv (m³/h)	OPD (bar)		Orifice (mm)	Seal Material	Valve Code
			AC Voltages	DC Voltages			
1/8"	0.04	0.03	0 - 15	0 - 12	1.0	FKM EPDM	RB397CVA RB397CEA
1/8"	0.05	0.04	0 - 15	0 - 12	1.2	FKM EPDM	RB397CVB RB397CEB
1/8"	0.07	0.06	0 - 10	0 - 8	1.5	FKM EPDM	RB397CVC RB397CEC
1/8"	0.13	0.11	0 - 8	0 - 6	2.0	FKM EPDM	RB397CVE RB397CEE
1/8"	0.18	0.15	0 - 4	0 - 4	2.5	FKM EPDM	RB397CVG RB397CEG
1/8"	0.25	0.21	0 - 3.5	0 - 3.5	3.0	FKM EPDM	RB397CVH RB397CEH


Options Available

Valve Options (see coding chart)
Electroless nickel plating treatment


Seal Material ¹ and Media Temperature Range	Media	Ambient Temperature Range	
		Min	Max
FKM (-10 °C to +130 °C)	Water, oil, air	-10 °C	+50 °C
EPDM (-10 °C to +120 °C)	Water, hot water	-10 °C	+50 °C

¹ See corrosion reference guide and sealing solutions for material compatibility.

RB397 Series, Automation – 3/2 Normally Open



Preferred Valve Mounting Options

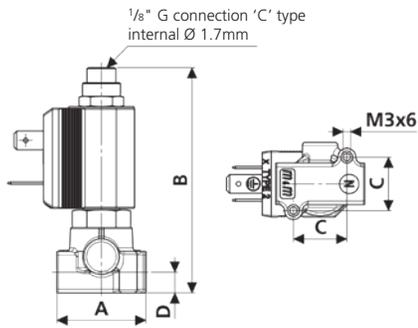

Pipe Size	A	B	C	D	Weight (kg)
1/8"	30	75.9	18	7	0.15

Dimensions (mm)

Solenoid enclosures

2--0 Type Coil - Insulation class F

- External material: PBT (reinforced fiberglass 30%)
- Electrical connection: Industrial form B
- Winding insulation: Class H (E180)
- Enclosure classification: Conforms to IP65 (according to EN 60529) with plug and gasket correctly fitted*



Type 600 001- Plug

- Rated Voltage (max.): 250 VAC / 300 VDC
- Nominal Current: 10A (rated) / 16A (max)
- Wire cross-section: 1.5 mm² max
- Cable Entry: PG9 (6 to 8 mm)
- Enclosure classification: Conforms to IP65 (according to EN 60529) with supplied gasket
- Insulation class: group C- VDE 0110
- Housing colour: black
- UL approved, file No: E205538



* Plug and gasket not supplied as standard, must be ordered separately.

Coding chart

Main Valve Assembly

Coil options

Plug

Seals					Orifice			Option		Voltage / Frequency - Class F				Plug					
V	FKM	A	1.0	K	Electroless nickel plating	2250	24 VDC	0B1	c/w plug	E	EPDM	B	1.2		w/o option	2200	24 V / 50/60 Hz		w/o plug
		C	1.5			2400	110 V / 50 Hz - 120 V / 60 Hz					E	2.0			2600	200 V / 50 Hz - 220 V / 60 Hz		
		G	2.5			2700	230 V / 50 Hz - 240 V / 60 Hz					H	3.0						

RB	3	9	7	C
----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Product coding example:

RB397CVB 2400
 1/8" G, auto operation, brass body, FKM seals, 1.2 mm orifice, 110 V / 50 Hz - 120 V / 60 Hz, without plug.