



VFE-993 - Electrically Actuated 2 Way Stainless Steel Ball Valve

Actuator	VF-0S						VF-05S	VF-1S		VF-15S	VF-2S
DN	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
A	201.5	201.5	211	219	227	233	238.5	274	296	308.5	366.5
E	169	169	169	169	169	169	169	196	196	196	254
L	189.5	189.5	189.5	189.5	189.5	189.5	189.5	189.5	189.5	189.5	243.5
D	110	110	110	110	110	110	110	110	110	110	214
Operating Time	10s	10s	10s	10s	10s	10s	10s	13s	13s	29s	34s

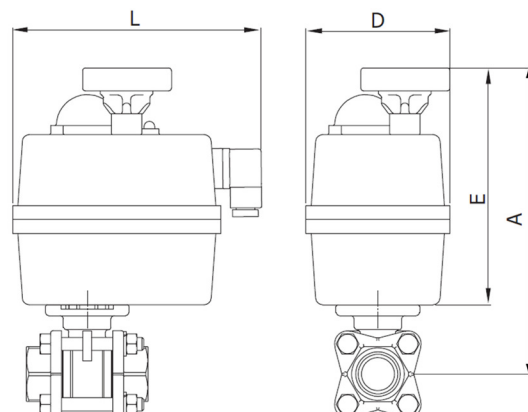

Actuator Specification		Valve Specification	
Enclosure	Weatherproof IP67	Body	Stainless Steel
Power	24V to 240V AC / 24V to 110V DC	Seats	RPTFE (15%)
Limit Switches	4X SPDT microswitches (2 motor stop and 2 confirmations)	Seals	PTFE
Anti-Condensation Heater	3.5W	Connection	Screwed BSP Taper
Connector	Large = EN175301-803 Form A / Small = DIN 43650/C	Maximum Pressure	1/4" - 1" - 82 Bar 1 1/4" - 1 1/2" - 69 Bar 2" - 4" - 62 Bar
Operating Temperature	-20°C to +70°C	Valve Operating Temperature	-25°C to +200°C
Manual Override	Declutching Handwheel	Ambient Temperature	-10°C to +50°C
Cover, Body, Cams Material	Polyamide A6	Bore	Full Bore
Options:	Battery Failsafe Digital Positioning System (4-20mA, 0-10V) 180° and 270° operation 12V AC/DC power supply		

Pressure / Temperature:

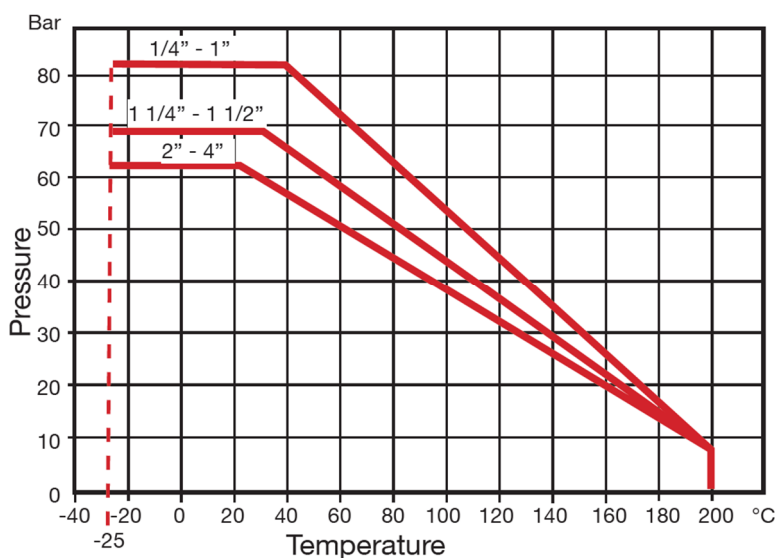


LED Status Indication		
No power	LED off	
Actuator Fully Closed	Red Led Solid	
Actuator Fully Open	Green Led Solid	
Moving Open > Closed	Red and Orange Flash	
Moving Closed > Open	Green and Orange Flash	
Torque lim. Engaged Open > Closed	Red Blinking	
Torque lim. Engaged Closed > Open	Green Blinking	
Manual Mode Engaged	Orange Blinking	
Battery Failsafe Activated Normally Closed	Red Intermittent	
Battery Failsafe Activated Normally Open	Green Intermittent	
Battery Failsafe Needs Charging	Orange Intermittent	
Digital Positioning System Stationary	Blue Solid	
Digital Positioning System Opening	Blue and Green Flash	
Digital Positioning System Closing	Blue and Red Flash	

Standard Electrical Connections


On - Off V AC

VF-0S - VF-15S

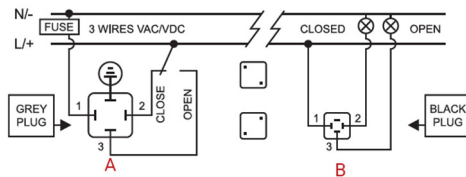


On - Off V DC


VF-0S - VF-15S

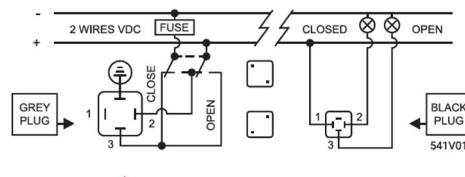

VF-2S - VF-2+S

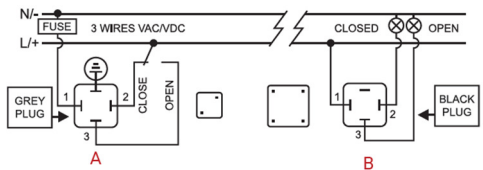

VF-2S - VF-2+S

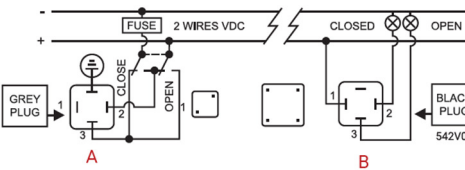

A = Power supply plug (Grey plug)

Neutral PIN 1 + Phase PIN 2 = Close Actuator

Neutral PIN 1 + Phase PIN 3 = Open Actuator

Earth/ground connection - Flat PIN


B = Volt free contact plug (Black Plug)

Common PIN 1 + PIN 2 = Close confirmation of position


Common PIN 1 + PIN 3 = Open confirmation of position

Positioner V AC / DC

VF-0S - VF-15S

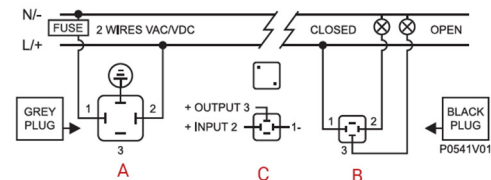

VF-2S - VF-2+S

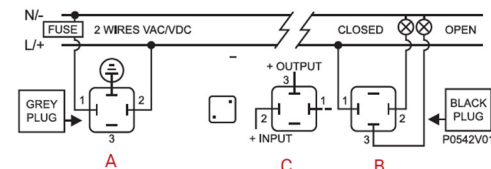

A = Power supply plug (Grey plug)

Neutral/Negative PIN 1 + Phase/positive PIN 2 - Power Supply

Earth/ground connection - Flat PIN

B = Volt free contact plug (Black Plug)

Common PIN 1 + PIN 2 = Close confirmation of position

Common PIN 1 + PIN 3 = Open confirmation of position

C = Input/output signal (Black plug)

Negative PIN 1 + positive PIN 2 = Input signal

Negative PIN 1 + positive PIN 3 = Output signal

C = Instrumentation signal **MAX 10V**

Digital Positioner System: Earth should not be connected to avoid self adjustment of the actuator position